

iCAM R100

Iris Recognition Camera Module



DUAL IRIS	FACE CAMERA	FLASH LED
	USB	TRIPOD

- High Speed Iris Capture & Matching in a compact package
- On or Off Device Iris Template Matching
- Up to 100K User record local 1:N matching in 1 second
- National ID Quality Iris Image - Standards Compliant
- Intuitive User Interface with Virtual LED Indication
- 5 MP face camera White LED flash
- Comfortable Capture Distance 28~38 cm (11~15 Inches)
- Flexible Mounting Options
- USB3.0 Powered

Iris ID (formerly LG Iris) has been producing commercial iris recognition systems since 1997. In thousands of locations, IrisAccess® authenticates the iris identity of more persons than all other iris platforms combined. Iris ID's rich experience in iris recognition is exemplified in the iCAM R100.

Previous handheld iris recognition systems required significant cooperation and for a subject to remain completely motionless in order to capture high quality iris images. Iris ID has developed a series of algorithms which provide the capability to capture iris images in any environment.

High Speed - Dual Iris capture


The iCAM R100 performs high-speed dual iris capture and outputs high quality ISO standards compliant images. Both eyes can be simultaneously captured. The R100 provides an unparalleled intuitive user interface, which makes the process easier for the user and operator. The R100 is also equipped with an orientation sensor and left and right iris capture management controls which can be selected prior to or during the process.

Technical Specifications

Applications

- Kiosks
- Portable Enrollment Systems
- Time & Attendance Clocks
- Iris Identity Dependent Application
 - Public Safety
 - Entitlement Programs
 - National ID

Mechanical Drawing

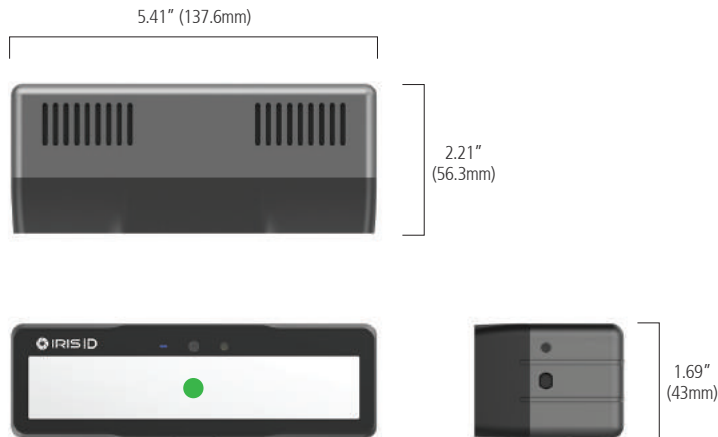


Accessory



Cradle

Capture Volume

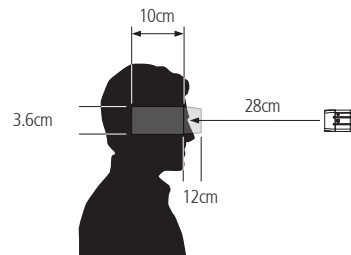

iDATA iCAM R100 SDK

Iris ID provides an API SDK to enable all functions of the iCAM R100. The development environment and functionality of the SDK for the iCAM R100 module closely mimics those of the widely deployed iData SDK for the IrisAccess iCAM series cameras. Application developers familiar with the other Iris ID development tools will find integration to be very simple.

SDK Versions

Three versions of the SDK are available:

- Image Capture only
- Image Capture & Quality Metrics
- Image Capture, Quality Metrics and Matching

Sample Application Source Code

The sample application source code is delivered as a part of the SDK. Sample SDK code is provided in C++ and C#.

Demonstration Application

A runtime only application is available for customer evaluation which provides the functionality to perform iris image capture and iris template matching.

iCAM R100 (Iris Camera Module)

Dimensions (W x H x D)	55.41" x 2.21" x 1.69" (137.6mm x 56.3mm x 43mm)
Weight	0.52lbs (240g)
Power Input	USB Powered (3.0 Port Only) Power Adapter Powered, 5VDC Operational Power: 4.3 watts / Standby Power: 2.3 watts
Iris Camera	1.2MP Auto & Manual Dual Iris Capture with B&W Image Sensor
Iris Capture Range	11" ~ 15" (28cm ~ 38cm)
Face Image Camera	Face Camera CMOS - 5MP
Flash	High Output Flash for Face Capture
Interface	USB 2.0 (or higher)
Orientation Sensor	Built-in Orientation Sensor
Indication	External: Blue LED - Power Indication, Green / Red / Amber LED - Status Internal: Green LED for Right Eye Positioning Sound (Optional by Application)
Speaker	1.2W
SDK	Windows COM, Android, Embedded LINUX
Operating Temperature	32°F ~ 122°F (0°C ~ 50°C)
Storage Temperature	-4°F ~ 203°F (-20°C ~ 95°C)
Humidity	0 ~ 95% Non-condensing
Certifications	CE, FCC, KC, Eye Safety, ISO Standard, KISA

Items Required for Use of This Product

Required Equipment (not provided by Iris ID)

- Windows based PC (Windows XP (32-bit) / Windows 7 (32/64-bit) / Windows 8 (32/64-bit) / Windows 10 (32/64-bit))

Minimum Computer requirements

- Microsoft Windows XP (32-bit), Windows 7 (32-bit), or Windows 7 (64-bit) OS
- 512MB RAM (or higher)
- x86 Processor, 2.0 GHz (or higher)
- 2GB available HDD space or above
- Microsoft .NET Framework ver. 3.5
- Mouse, SVGA Monitor, Keyboard
- Dedicated USB 2.0 port (or higher)
- USB 2.0 port may be used but the iCAM R100 will require external power adapter. USB 3.0 or higher is recommended.

Optional Support for:

- Android devices
- Embedded LINUX devices

NOTE An available and dedicated USB 2.0 compliant port is needed to properly use the iCAM R100.

IRIS ID AUTHORIZED RESELLER



Iris ID Systems, Inc.

8 Clarke Drive, Cranbury, NJ 08512, USA
Tel. 609-819-IRIS(4747) Fax. 609-819-4736

www.irisid.com

©2015 Iris ID Systems, Inc. All rights reserved. Design and specification subject to change without notice.

formerly LG IRIS

